

NOTE:
ALL JBLS HOMES ARE DESIGNED FOR SETTLING.
THE OWNER/CONTRACTOR MUST INSURE THAT THE
HOME IS BUILT IN ACCORDANCE WITH THE
CONSTRUCTION METHODS ILLUSTRATED IN THE JBLS
STANDARD DETAILS PROVIDED.

ALL SETTLING JACKS ARE BEARING POINTS
AND MUST BE LOCATED OVER POST OR GANG STUDS.
THESE LOCATIONS MUST CORRESPOND WITH BEARING
POINTS IN THE FOUNDATION SYSTEM.


ALL INTERIOR PARTITION WALLS SHOWN ARE 3 1/2" UNLESS OTHERWISE NOTED.

ALL GLU-LAMS ARE 24F-V4 ARCHITECTURAL DOUGLAS FIR OR EQUAL UNLESS OTHERWISE NOTED.

ALL INTERIOR JACKS ARE 1".

WINDOW SCHEDULE								
ID	Manufacturer	Description	Rough Opening	JBLS R.O. in Log Wall				
Α	By Others	2456 TWIN	5'-0" x 5'-9 1/16"	5'-3" x 6'-0 3/4"				
В	By Others	20210 TWIN	4'-4" x 3'-1 1/16"	4'-7" x 3'-4 3/4"				
С	By Others	18310 TWIN	3'-8" x 4'-1 1/16"	3'-11" x 4'-4 3/4"				
D	By Others	3046	3'-2 3/8" x 4'-9 1/16"	3'-6" x 5'-0 3/4"				
Е	By Others	2846	2'-10 3/8" x 4'-9 1/16"	3'-1" x 5'-0 3/4"				

DOOR SCHEDULE					
ID	Manufacturer	Description	Rough Opening	JBLS R.O. in Log Wall	
1	By Others	6068 SWINGER	6'-3 3/4" x 6'-10"	6'-7" x 7'-1 1/2"	
2	By Others	3068	3'-2 1/2" x 6'-10"	3'-6" x 7'-1 1/2"	
3	By Others	3068 FRENCH W/2-14"S.L.	5'-9 1/2" x 6'-10"	6'-1" x 7'-1 1/2"	

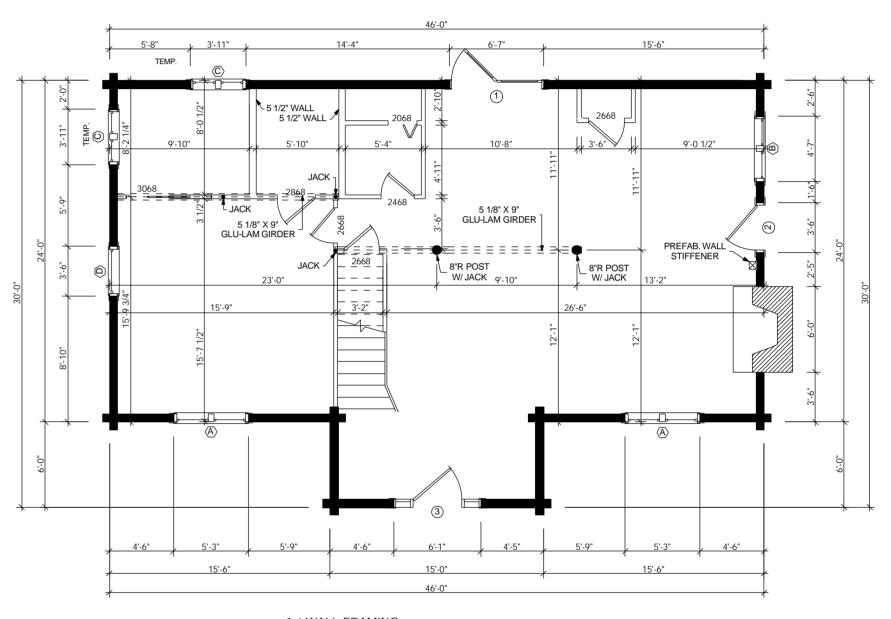

1st WALL FRAMING

Scale : 1/4" = 1'-0"